

ELITE SERIES N TOPCON TECHNOLOGY

BiN-17-615 to BiN-17-645

Framed Dual Glass Bifacial module

WAAREE[®]
One with the Sun



Highest reliability & enhanced crack tolerance MBB module



Sustain heavy snow & wind loads (5400 Pa & 2400 Pa)



Best in class thermal coefficients




Highest commercial gains, lower LCOE




Better weak light performance




Excellent PID resistance

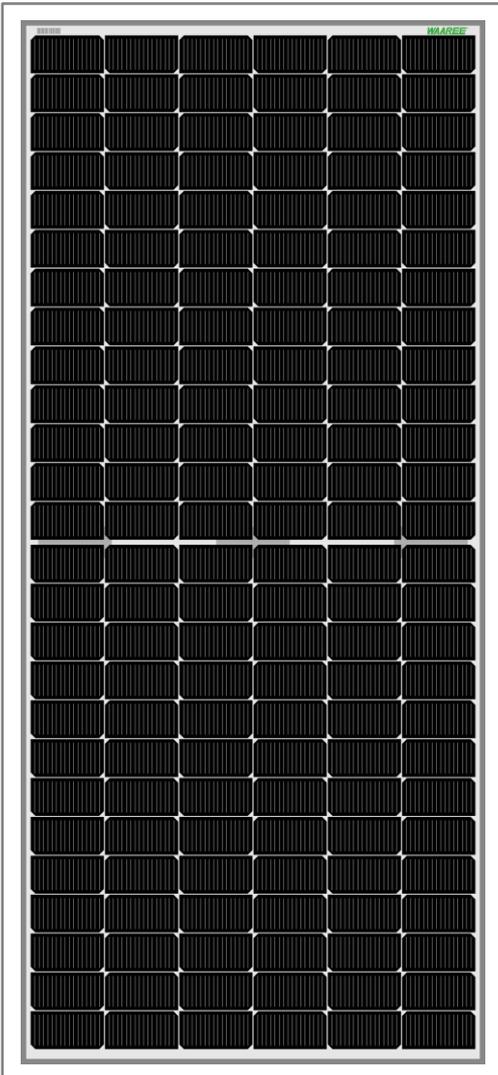


I-V VARIATION WITH IRRADIANCE

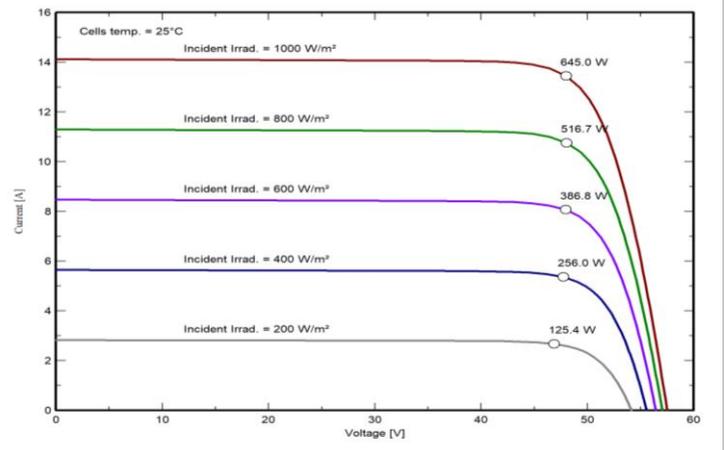

I-V VARIATION WITH TEMPERATURE

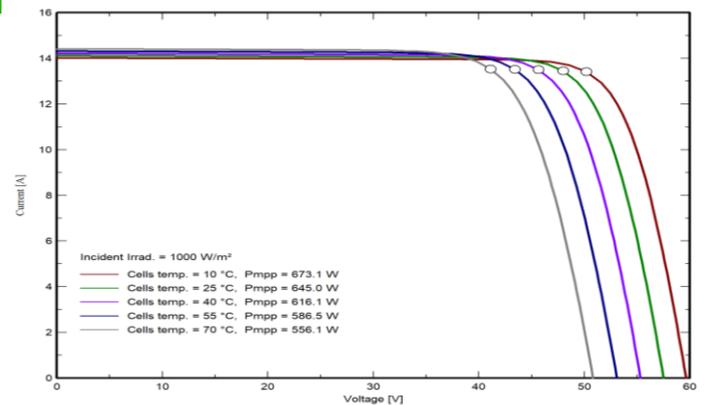

The Graphs are for reference purpose only. Please consult Waaree technical team for further clarifications.

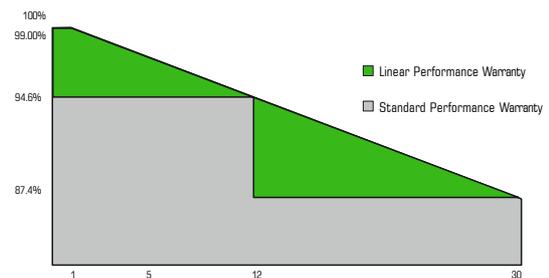

IEC 61215, IEC 61730
UL 61730-1, UL 61730-2

ISO 9001:2015 | ISO 14001:2015 | ISO 45001:2018
Independent assessment of factories by BLACK & VEATCH

ELITE SERIES N TOPCON TECHNOLOGY

BiN-17-615 to BiN-17-645

Framed Dual Glass Bifacial module

WAAREE[®]
One with the Sun

ELECTRICAL CHARACTERISTICS

Models	Pmax (W)		Vmp (V)		Imp (A)		Isc (A)		Voc (V)		Module Eff. (%)
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	
BiN-17-615	615	464.30	47.27	44.06	13.01	10.51	13.78	11.12	56.55	53.72	22.00
BiN-17-620	620	468.10	47.44	44.21	13.07	10.56	13.83	11.16	56.71	53.87	22.18
BiN-17-625	625	471.90	47.60	44.36	13.13	10.61	13.88	11.20	56.88	54.04	22.36
BiN-17-630	630	475.70	47.73	44.48	13.20	10.67	13.94	11.25	57.02	54.17	22.54
BiN-17-635	635	479.40	47.89	44.63	13.26	10.71	13.99	11.29	57.18	54.32	22.72
BiN-17-640	640	483.20	48.01	44.75	13.33	10.77	14.05	11.34	57.33	54.46	22.90
BiN-17-645	645	487.00	48.17	44.89	13.39	10.82	14.11	11.39	57.49	54.61	23.07

*Standard Test Conditions (STC) - 1000 W/m² irradiance, Air Mass 1.5 and 25°C cell temperature. Nominal Operating Cell Temperature (NOCT) - 800 W/m² irradiance, Air Mass 1.5, Ambient temperature 20°C and Wind speed 1 m/s. Average power reduction of 4.5% at 200 W/m² as per IEC 60904-1. Measuring Uncertainty ± 3%.


System Voltage	1500 V	Series Fuse Rating	30 A
----------------	--------	--------------------	------

BI-FACIAL OUTPUT - BACKSIDE POWER GAIN*

		BiN-17-615	BiN-17-620	BiN-17-625	BiN-17-630	BiN-17-635	BiN-17-640	BiN-17-645
15%	Power Output (W)	707.25	713	719	725	730	736	742
	Module Efficiency (%)	25.30	25.51	25.71	25.92	26.13	26.34	26.53
20%	Power Output (W)	738	744	750	756	762	768	774
	Module Efficiency (%)	26.40	26.62	26.83	27.05	27.26	27.48	27.68
25%	Power Output (W)	768.75	775	781	788	794	800	806
	Module Efficiency (%)	27.50	27.73	27.95	28.18	28.40	28.63	28.84
30%	Power Output (W)	799.5	806	813	819	826	832	839
	Module Efficiency (%)	28.60	28.83	29.07	29.30	29.54	29.77	29.99

*The bifacial gains are dependant on the power plant design and location

DESIGN SPECIFICATIONS

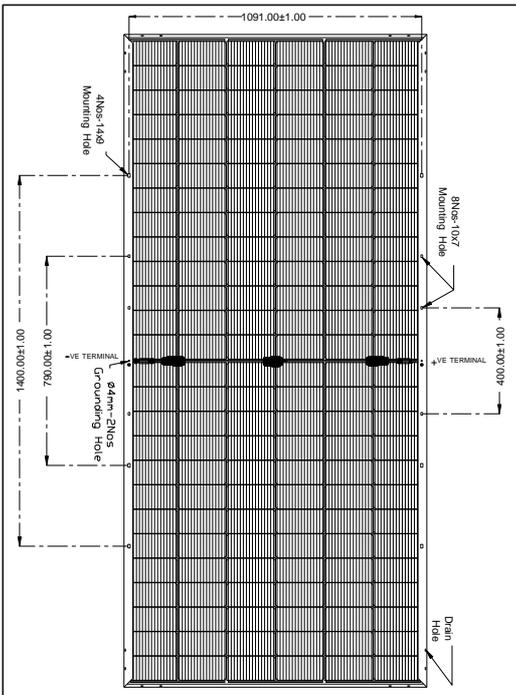

THERMAL CHARACTERISTICS

Temperature coefficient of Current (Isc), α (%/°C)	0.046
Temperature coefficient of Voltage (Voc), β (%/°C)	-0.26
Temperature coefficient of Power (Pm), γ (%/°C)	-0.30
NOCT (°C)	43 ± 2
Operating temperature range (°C)	-40 to 85
Bifaciality Factor (%)	80 ± 10

MECHANICAL CHARACTERISTICS

Length x Width x Thickness (L x W x T)	2465 mm (L) x 1134 mm (W) x 33 mm (T)
Weight	34.5 kgs
Solar Cells per Module (Units) / Arrangement	156 cells / (13x6 13x6)
Solar Cell Type & Size	M10/M10R N-type TOPCon Bifacial
Front Glass (Material / Thickness)	2 mm Low Iron HTAR semi-tempered glass
Back Glass (Material / Thickness)	2 mm Low Iron Printed semi-tempered glass
Encapsulate	PID Free & UV Resistant
Junction Box (Protection degree / Material)	IP68 / Weatherproof PPO
Cable & Connector (Protection degree / Type)	IP68 rated / MC4 compatible
Cable cross - section & Length	4 mm ² & 500mm
Frame	Anodized Aluminium Alloy

Waaree Energies Ltd. is amongst the top Solar Energy Companies and has the country's largest Solar PV Module manufacturing capacity of 12 GW. In addition, it is committed to provide top notch EPC services, project development, rooftop solutions, solar water pumps and also in an Independent Power Producer. Waaree has its presence in over 350+ locations nationally and 68 countries globally.

12 Years Product Warranty • 30 Years Power Output Warranty

- The electrical data given here is for reference purpose only.
- Please confirm your exact requirements with the sales representative while placing your order.
- Refer installation Manual instructions & Waaree warranty statement for terms & conditions.
- Waaree Reserves the right to change the specifications without prior notice.

www.waaree.com